

CEC
CALIFORNIA ELECTRIC MOUNTING SYSTEMS

KAISTAR
Lighting

bridgelux
INTEMATIX

LED Canopy Light

3 CCT & Wattage Selectable



Certain certifications pending, inquire as to status.



• 35W/50W/75W



• 100W/120W

Features


- Low-profile, stylish design with durable powder coat finish
- Powered by 0–10V dimming LED drivers
- Color adjustable CCT :3000K/4000K/5000K or tailor made.
- Ambient operating temperature: –40°C/–40°F to 45°C/113°F.
- 4KV surge protection.
- Suitable for commercial and industrial applications.




CCT & Wattage Selectable




Wattage Select



100% (Default)



80%



60%

Photocell




Sensor ON




Sensor OFF
(Default)


CCT Select



5000K (Default)




4000K



3000K

Dimension

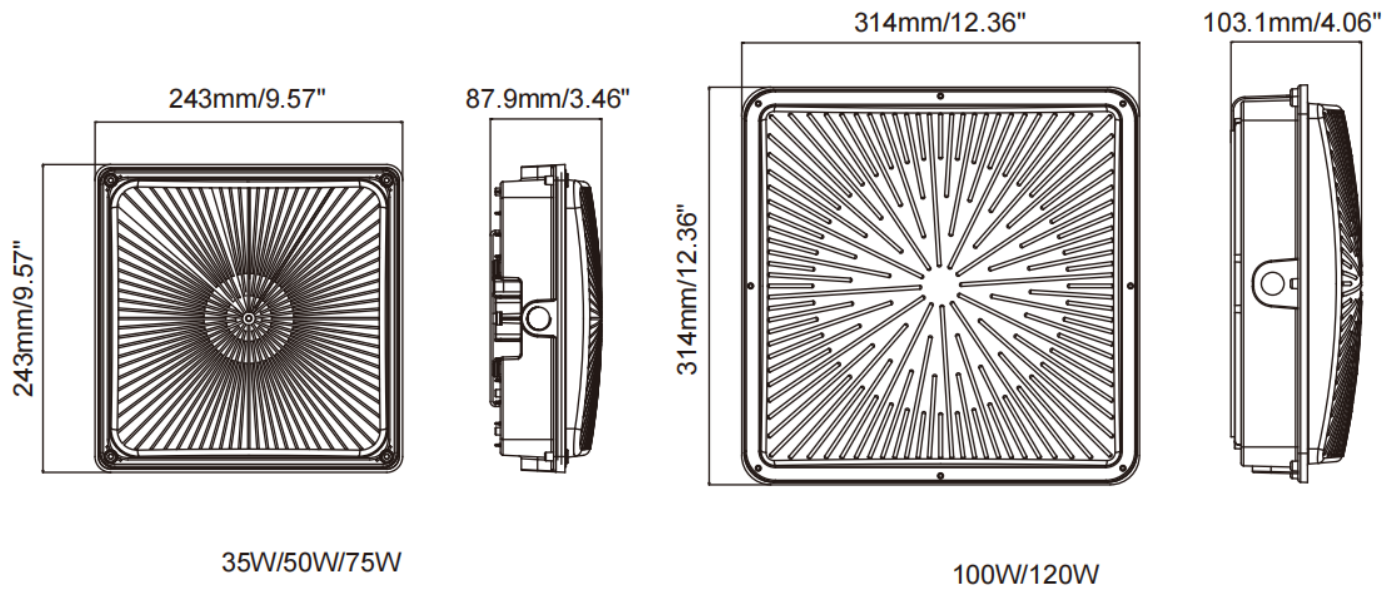


Specification*

Model No.	Dimension	Power (W)	CCT(K)	CRI	Lumens(lm)	Beam Angle	Dimmable
KSCP01-35W	9.57"x9.57"x3.46" (243x243x87.9mm)	35	4000K (Optional)	>70	4550	160°	0-10V Dimmable
KSCP01-50W	9.57"x9.57"x3.46" (243x243x87.9mm)	50	4000K (Optional)	>70	6500	160°	0-10V Dimmable
KSCP01-75W	9.57"x9.57"x3.46" (243x243x87.9mm)	75	4000K (Optional)	>70	9750	160°	0-10V Dimmable
KSCP01-100W	12.36"x12.36"x4.06" (314x314x103.1mm)	100	4000K (Optional)	>70	13000	160°	0-10V Dimmable
KSCP01-120W	12.36"x12.36"x4.06" (314x314x103.1mm)	120	4000K (Optional)	>70	15600	160°	0-10V Dimmable
KSCP01-50W-CCT	9.57"x9.57"x3.46" (243x243x87.9mm)	30/40/50W Selectable	3000K/ 4000K/ 5000K Adjustable	>70	3900/5200/ 6500	160°	0-10V Dimmable
KSCP01-75W-CCT	9.57"x9.57"x3.46" (243x243x87.9mm)	45/60/75W Selectable	3000K/ 4000K/ 5000K Adjustable	>70	5800/7800/ 9700	160°	0-10V Dimmable
KSCP01-120W-CCT	12.36"x12.36"x4.06" (314x314x103.1mm)	72/96/120W Selectable	3000K/ 4000K/ 5000K Adjustable	>70	9300/12400/15600	160°	0-10V Dimmable

*All specifications & parameters @25C° & subject to change without notice. All data tolerance +/- 5%

Installation way

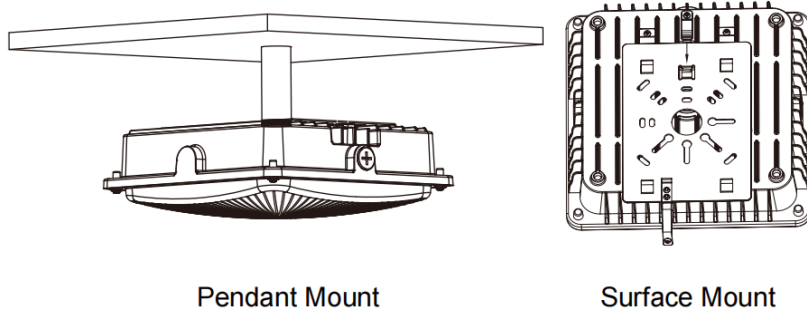

Light Distribution Curve

