

CEC

KAISTAR
Lighting

bridgelux
INTEMATIX



LED High Bay UFO CCT & Power switch




Certain certifications pending, inquire as to status.




Features

- Die-cast powder coated construction and heat sink for optimum thermals and performance.
- High efficacy up to 170lm/W.
- CCT Adjustable 4000K, 5000K, 6500K or as custom design color.
- 1-10V dimmable / DALI dimmable for options.
- Plug and play microwave and PIR sensor options, offering maximum energy saving
- Intelligent plug and play emergency pack option offers a quick and simple conversion from standard to emergency highbay (cannot be used in conjunction with surface mounting bracket)
- IK10 and IP65 rating, ideal for industrial, commercial and retail applications.


Structure

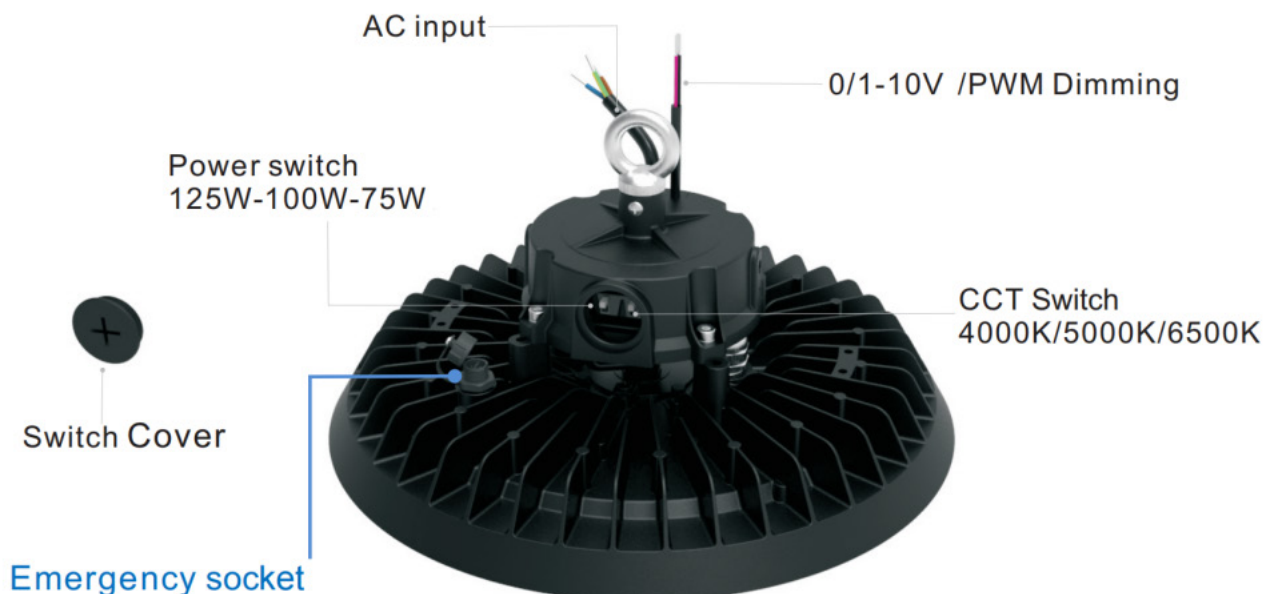

Microwave Sensor

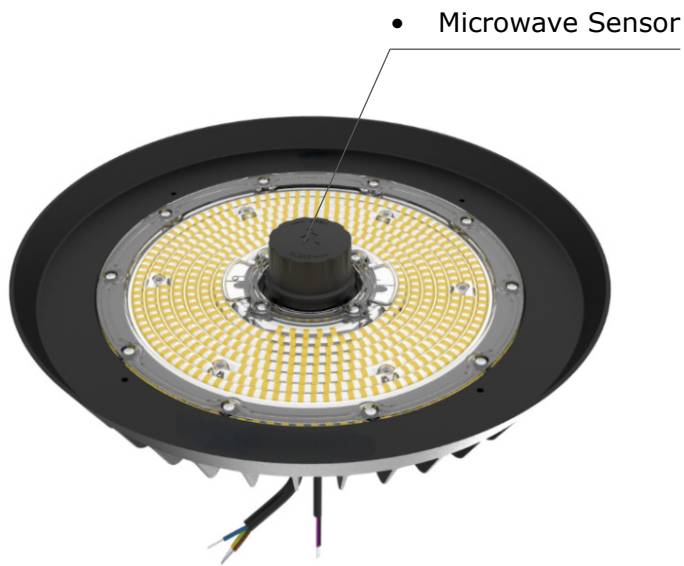

Infrared Sensor

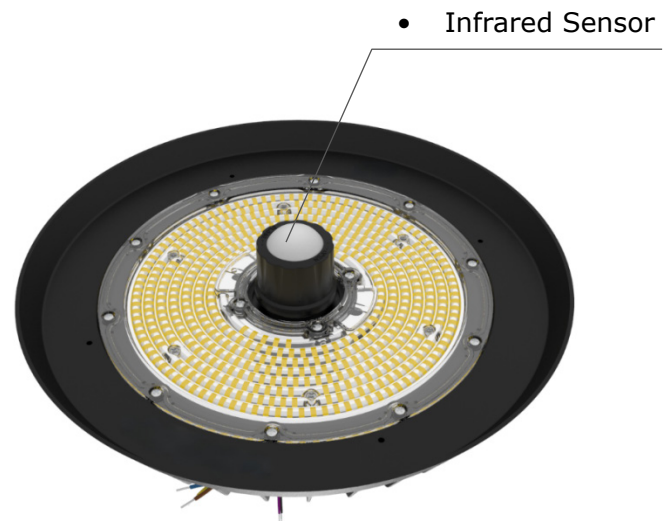


Specification*

Model No.	KSHBL07-125W	KSHBL07-200W
Wattage	75W/100W/125W	150W/175W/200W
Dimensions(L x H mm)	Φ310x165mm	Φ355x170mm
Input Voltage	AC120-277V 50/60Hz	
LED Chip	3030 SMD	
CRI	> 70 / 80 Options	
Color Temperature	CCT Adjustable 4000K/5000K/6500K	
Dimming	0-10V / Dali optional	
Emergency Fitting	Options	
Luminous Flux Efficiency	170 - 180 lm/W	
Beam Angle	120 °	
Operation Temp & Humidity	-40 ~ 50 °C, 20~95%RH No condensation	
Storage Temp & Humidity	-40 ~ 85 °C, 10~95%RH No condensation	
Life Span	50000Hrs	
IP Rating & IK Class	IP65 & IK 10	
Body Material	Aluminium Body & Polycarbonate Diffuser	
Installation mode	Hook / Bracket Mount (Reference the installation Manual)	
Warranty	5 Years	



*All specifications & parameters @25C° & subject to change without notice. All data tolerance +/- 5%

Dimensions

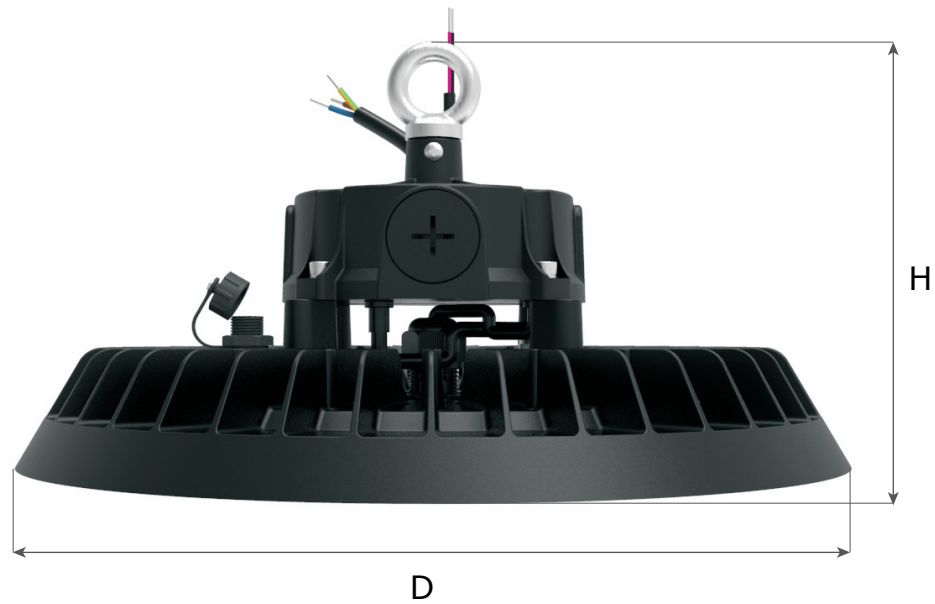

Model No.	Power	Size (mm)
KSHBL07-125W	75W/100W/125W	D310xH165MM
KSHBL07-200W	150W/175W/200W	D355xH170MM

Optical

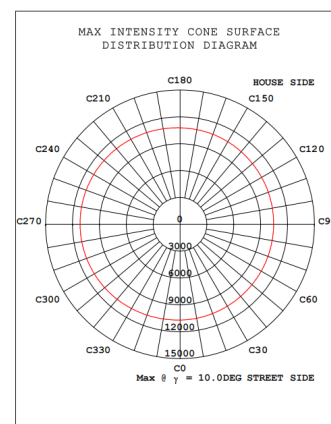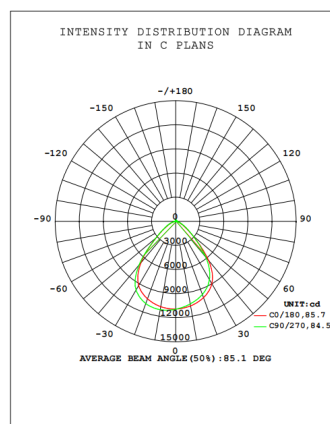

Accessories Optional



- Aluminum Reflector

